


# rotowash

## Accessory - Sidebrush Kit Pt No's 777YO2, 778YO2, 779YO2 & 795YO2

1. To fit the sidebrush kit first remove the front axle. Both the front and rear axles are easily removed, push the axle with your finger and remove it from the opposite side of the machine.(See pic.A.)

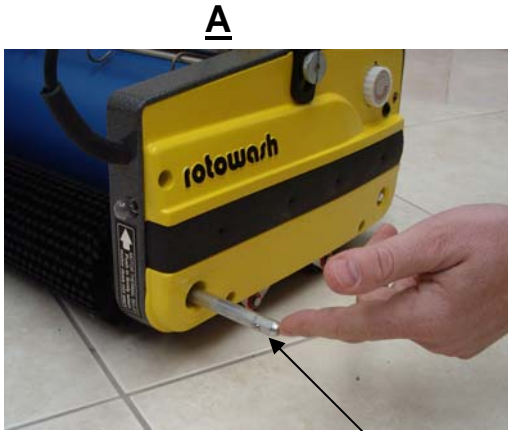


Axle



Plug

2. Remove the side cover and push out black plug.(See pic.B.)
3. Insert sidebrush axle (See pic C) in place of the axle and the side brush cover pin (See pic.C) in place of the Plug (Pic B)

C.

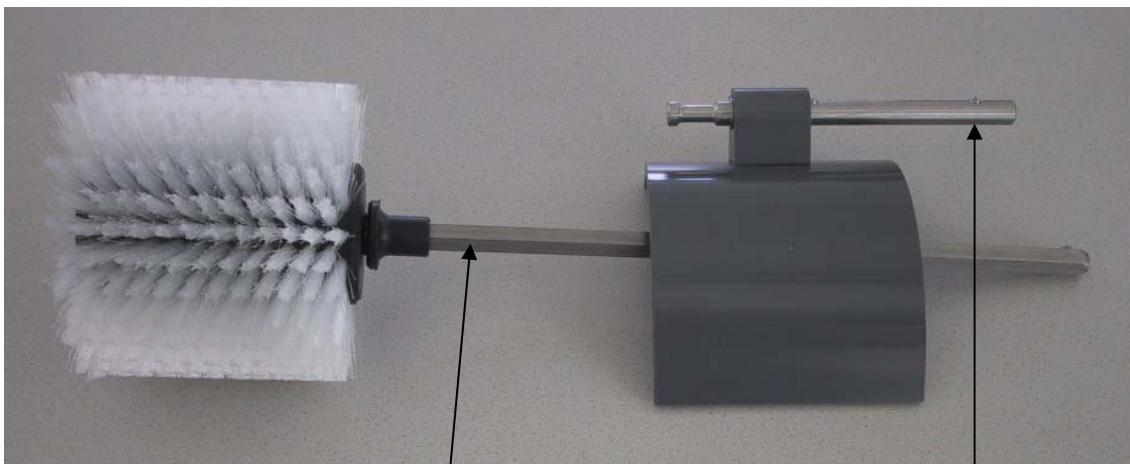

Sidebrush axle

Sidebrush cover pin